



# General Introduction to the training

ECREEE Regional Training of Trainers Workshop:  
HOMER software for RE project design

**ECREEE Secretariat**  
**Achada Santo Antonio**  
**B.P. 288, Praia – Cape Verde**  
**Tel: +2382624600**  
<http://www.ecreee.org>  
[info@ecreee.org](mailto:info@ecreee.org)

May 2013



# I. Considerations for an hybrid system in this training (I)

Definition of hybrid system



# What is an hybrid system in this training?

For a first comprehensive understanding of an *hybrid energy system*, watch the following public video on renewable energy technology for stand-alone grids.



TO SEE THE VIDEO, CLICK ON THE LINK OR COPY AND PASTE THIS LINK INTO YOUR WEB BROWSER ADDRESS BAR

<http://player.vimeo.com/video/52066424?title=0&byline=0&portrait=0&badge=0&color=ffffff&autoplay=1>

This video has been developed by the SMA Solar Technology AG





# Definition of Hybrid System for this training

- **Hybrid system:** electricity generation system, based on the integration of various energy sources (such as photovoltaics, wind turbines, small hydro power or diesel generators).

*Source: ECREEE*

- (...) hybrid configurations can potentially deliver improved performance and better economics for a given electrification situation.

*Source: ESMAP, 2007*




## II. Considerations for an hybrid system in this training (II)

General architecture of an energy system



# General architecture of an energy system (simplified)

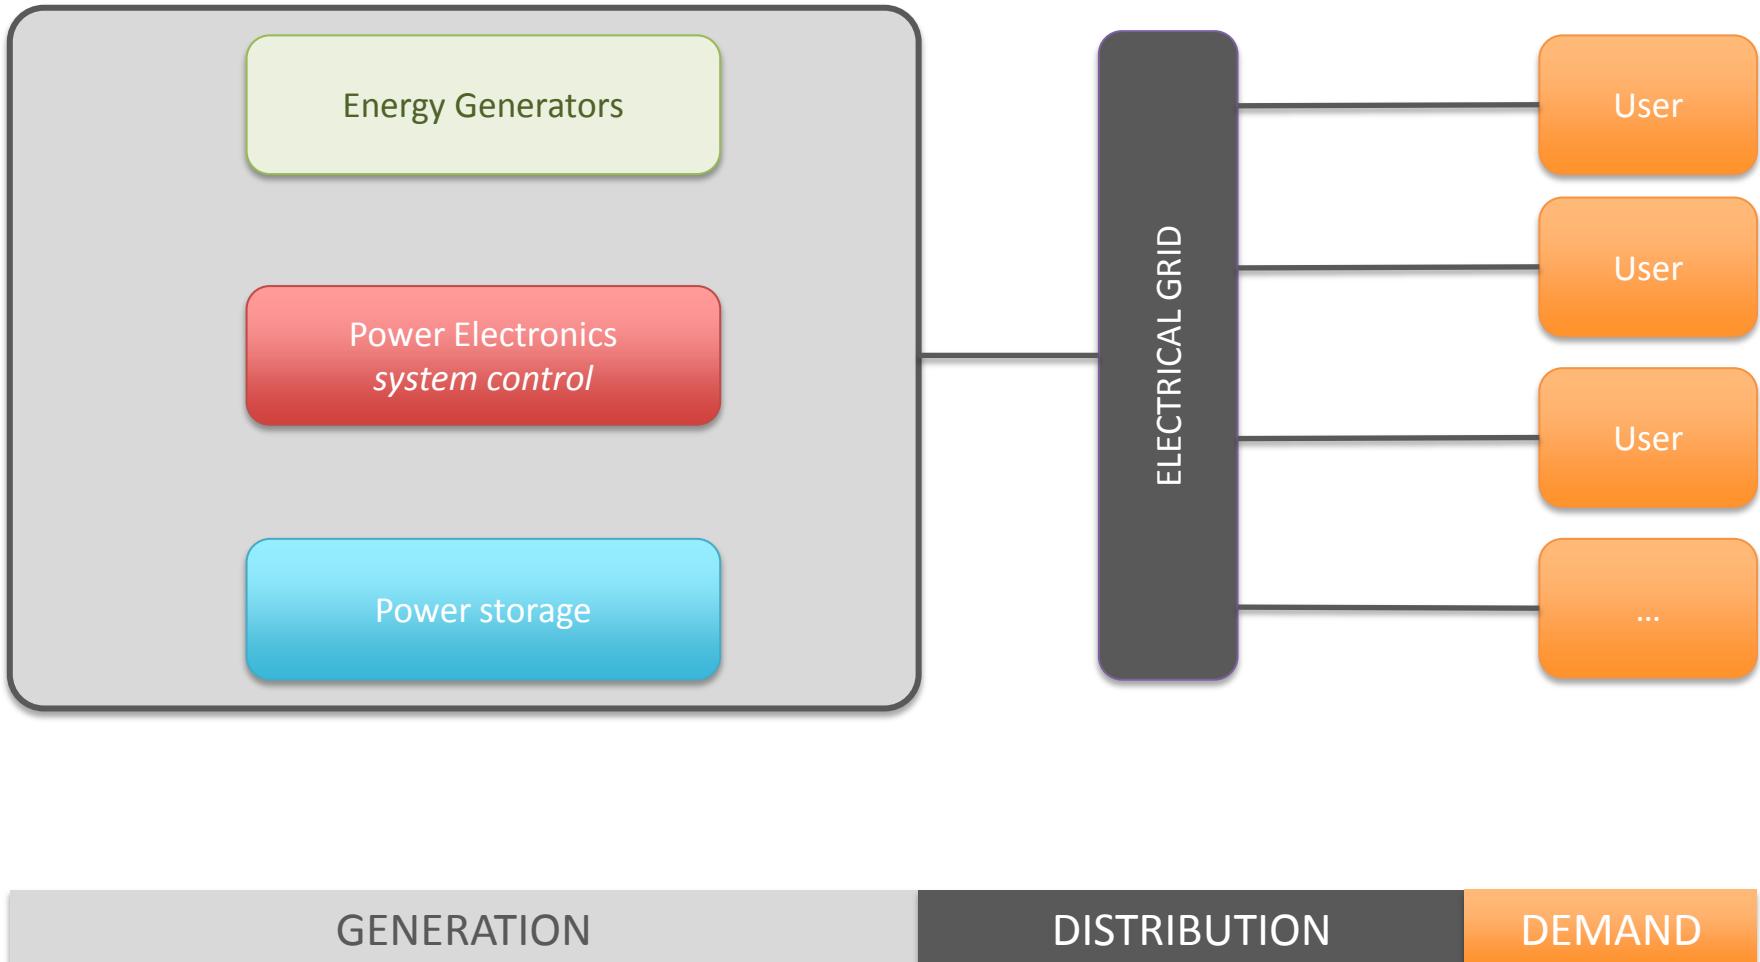



# III. Considerations for an hybrid system in this training (III)


Architectures for hybrid systems  
based on the control strategy



# Architectures for hybrid systems based on the control strategy


- There are several system architectures for hybrid systems. Based on the power electronics' control strategy, two examples are:
  - Alternate Current bus coupling
  - Direct Current bus coupling
- Other architectures for hybrid systems may have a mixed combination of the two above.
- These architectures have to be taken into consideration when dimensioning and simulating the hybrid system.

# SYSTEM ARCHITECTURE: AC BUS COUPLING

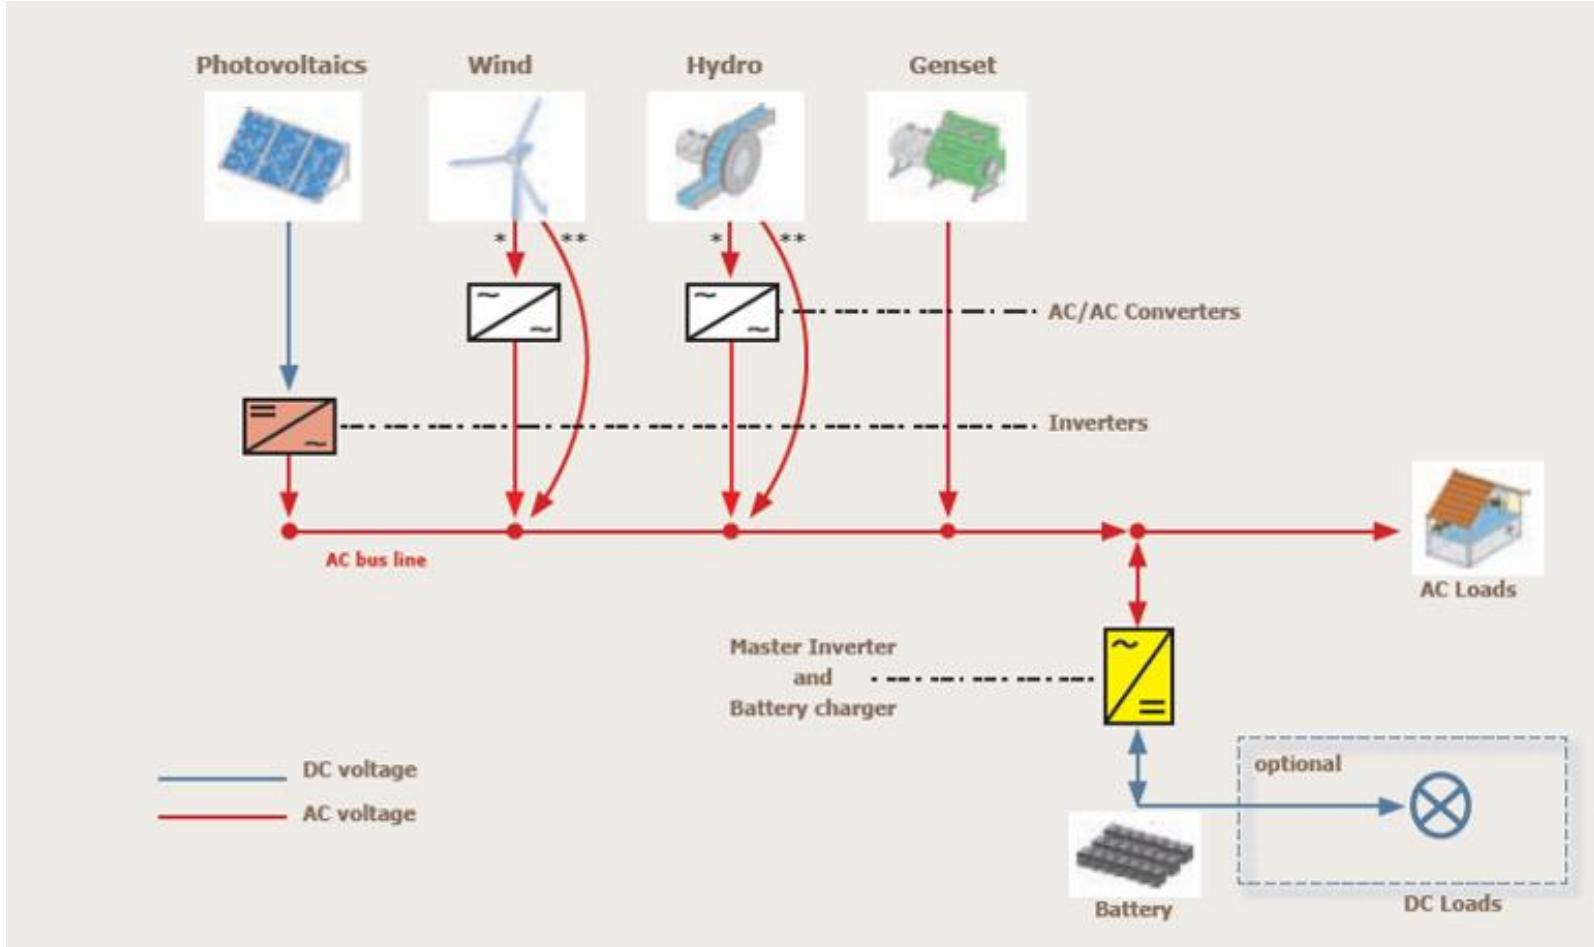


# AC BUS COUPLING

## EXAMPLE OF TECHNICAL SCHEME

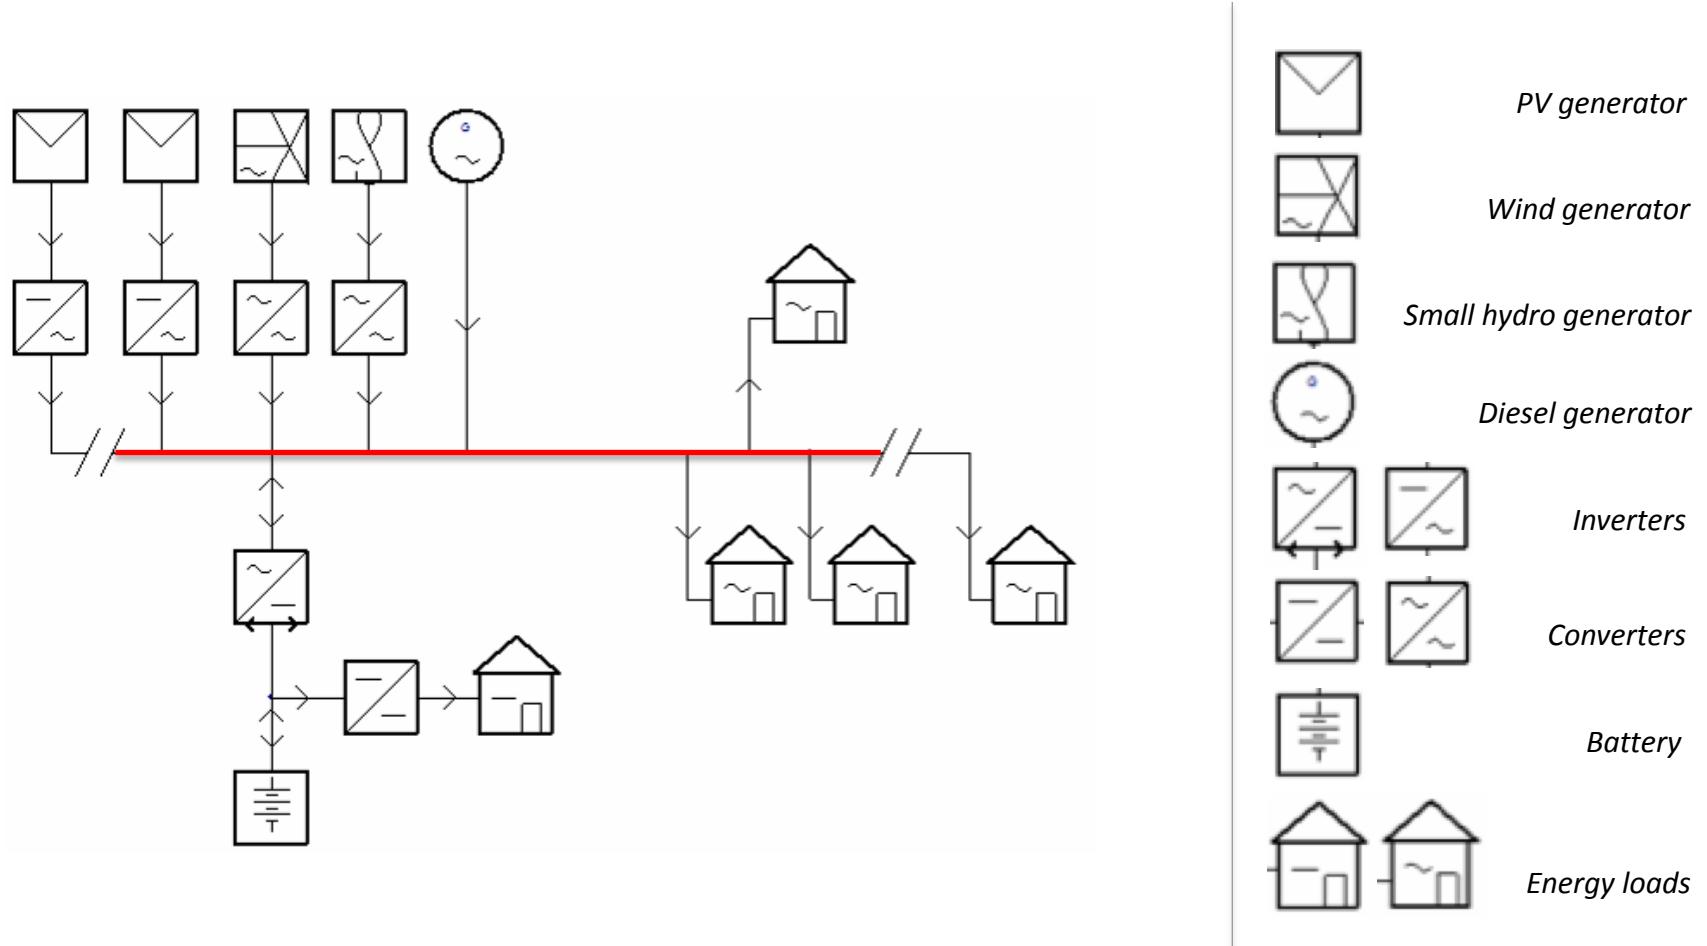


# SYSTEM ARCHITECTURE: DC BUS COUPLING

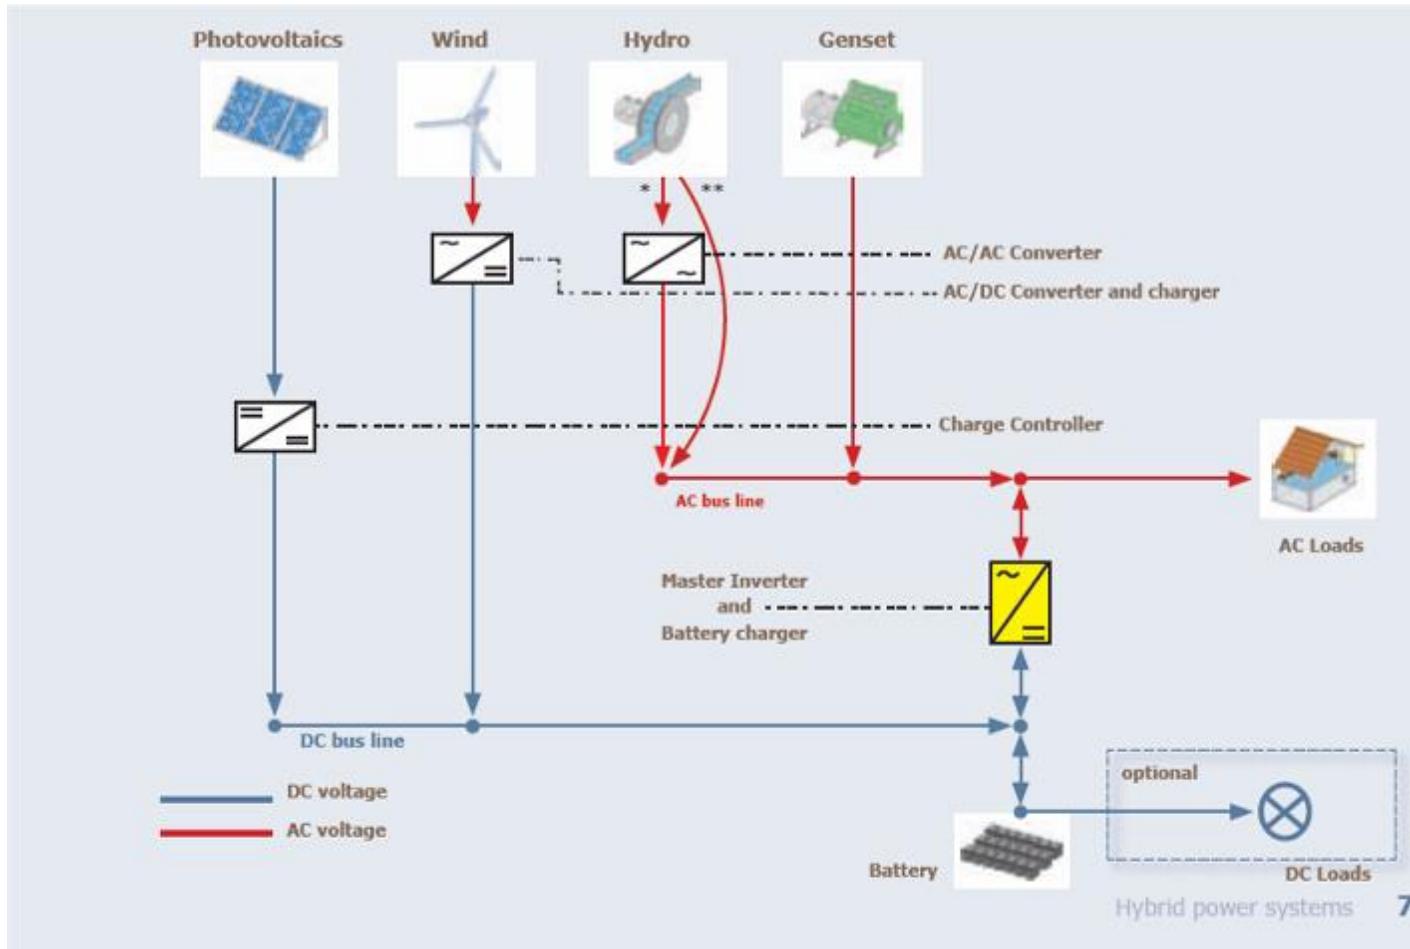



# DC BUS COUPLING

## EXAMPLE OF TECHNICAL SCHEME

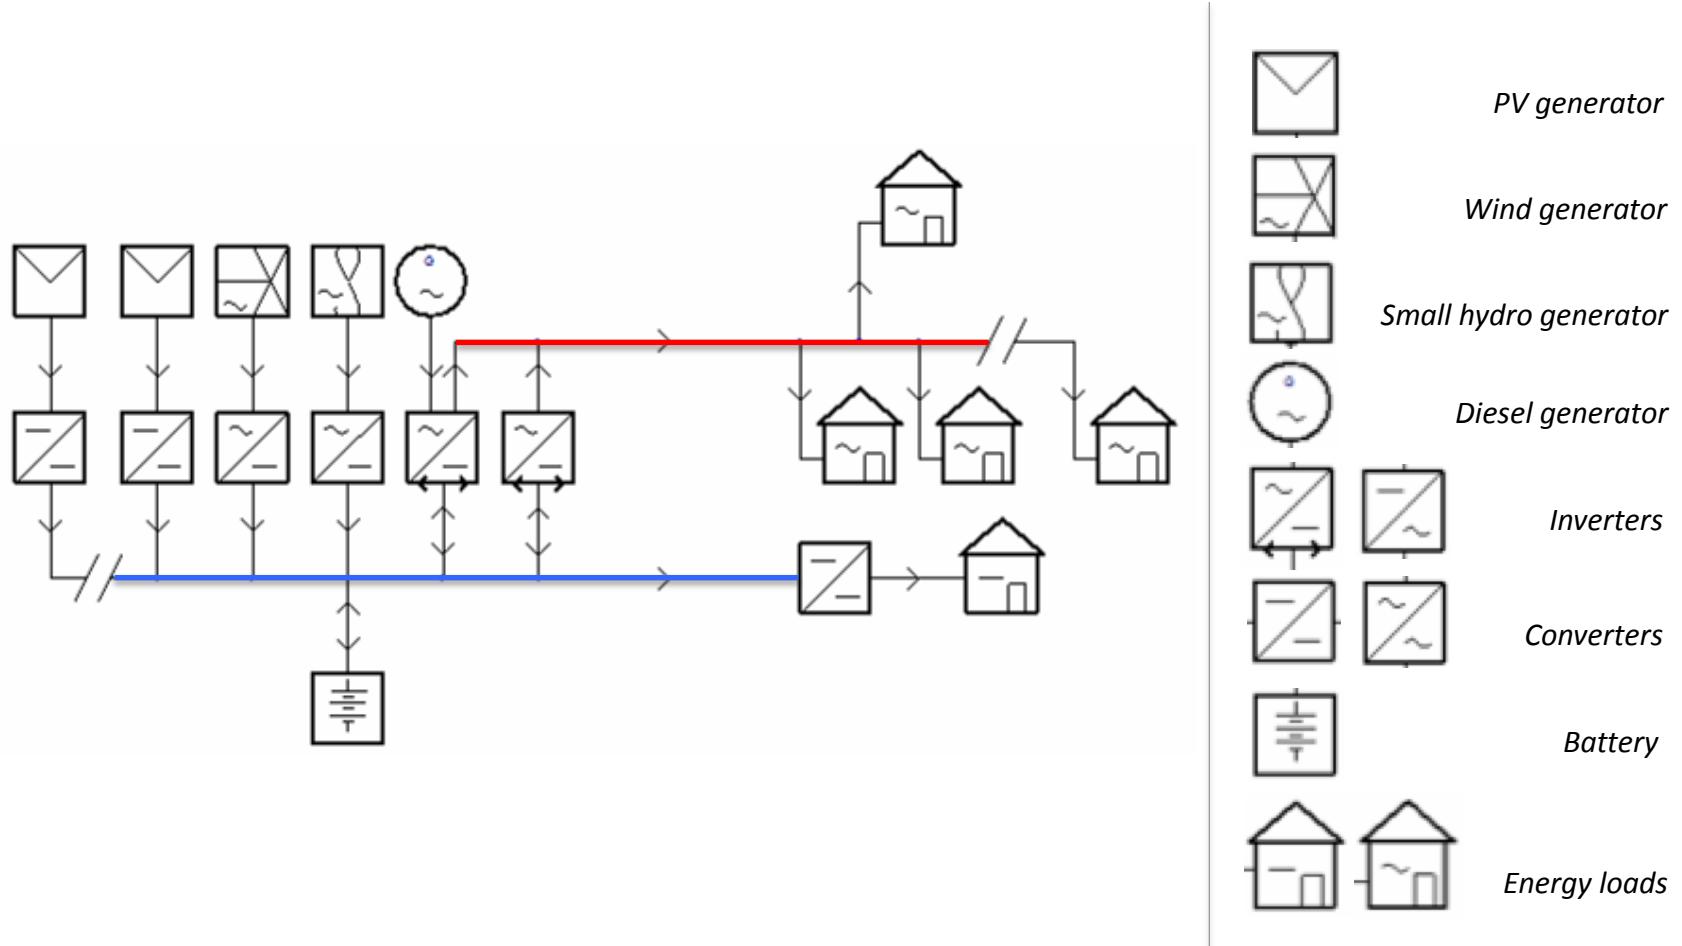



# IV. Considerations for an hybrid system in this training (IV)

Hybrid system's input units



# INPUT UNITS

-   PV
-   Wind Turbine 1
-   Hydro
-   Converter
-   Generator
-   Battery

<i>PV generator</i>	<i>(kW)</i>	<i>Kilowatt</i>
<i>Wind Turbine</i>	<i>(Quantity)</i>	<i>number of units</i>
<i>Hydro</i>	<i>(m) meters of head (L/s) liters per second or flow</i>	
<i>Converter</i>	<i>(kW)</i>	<i>Kilowatt</i>
<i>Generator</i>	<i>(kW)</i>	<i>Kilowatt</i>
<i>Battery</i>	<i>(Quantity)</i>	<i>number of units</i>




## V. Example of an operational energy system in an isolated village of 600 people

Monte Trigo, Cape Verde, West Africa



# Monte Trigo's energy system

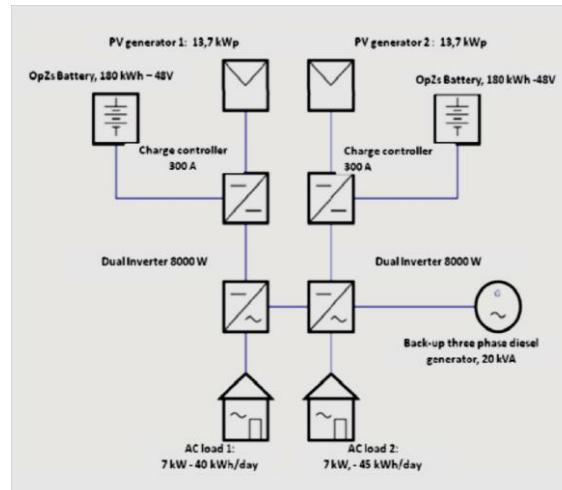

Source: BRIGANTI et al, 2012



# Technical notes of the system

- In February 2012, entered into service Cape Verde's first rural micro grid with 100% renewable energy generation. This project was carried out within the framework of the "Energy Facility" ACP-EU program. Permanent electricity access had been strongly requested by the local stakeholders and community of the village to cover basic energy needs such as lighting, communication, community services and ice production for fish conservation.
  - The objective of the project was the electrification of the village of Monte Trigo (600 people) in Santo Antão Island, with a Multiuser Solar micro-Grid (MSG).
  - The project was implemented in 2011, and is currently in the post commissioning follow-up period. A key aspect of the project has been to ensure the long-term sustainability of the electricity service. In addition to the description of the plant and the operation and management scheme, this article underlines the importance of the Energy Daily Allowance (EDA) concept from social, technical and economic perspectives. In conclusion the article intends to highlight the validity of both the technical solution and management model.
  - *Among other expert methods of calculation, simulation tools were used to analyze the feasibility and the design of the system.*
- ✓ For further reading (1): **CLICK ON THE LINK OR COPY AND PASTE THIS LINK INTO YOUR WEB BROWSER ADDRESS BAR**  
<http://www.ecowrex.org/document/implementation-pv-rural-micro-grid-island-santo-antao-cape-verde-individual-energy>



# VI. Considerations on energy demand (I)

UNITS



# UNITS

- Power (kW) *Kilowatt*
- Time (h) *hour*
- Energy (kWh) *Kilowatt(hour)*

**Generation (generator side):** is the energy produced by the *power* of an energy generator during a certain period of *time*.

*Energy = Power of an energy generator (kW) · Time (period of hours)*

**Energy Demand (users side):** is the total energy the consumers need, during a certain period of time; and the amount of energy that normally they are charged for (as part of an arbitrary tariff).

Normally, the energy produced by an energy generator has to be higher than the energy demand. This is related to the losses and performance of the system, among other factors, that have to be carefully taken into consideration. This issue will be out from this training due to the deep level of analysis that it needs.




# VII. Considerations on energy demand (II)

LOAD PROFILE




# Example of daily load profile (1)

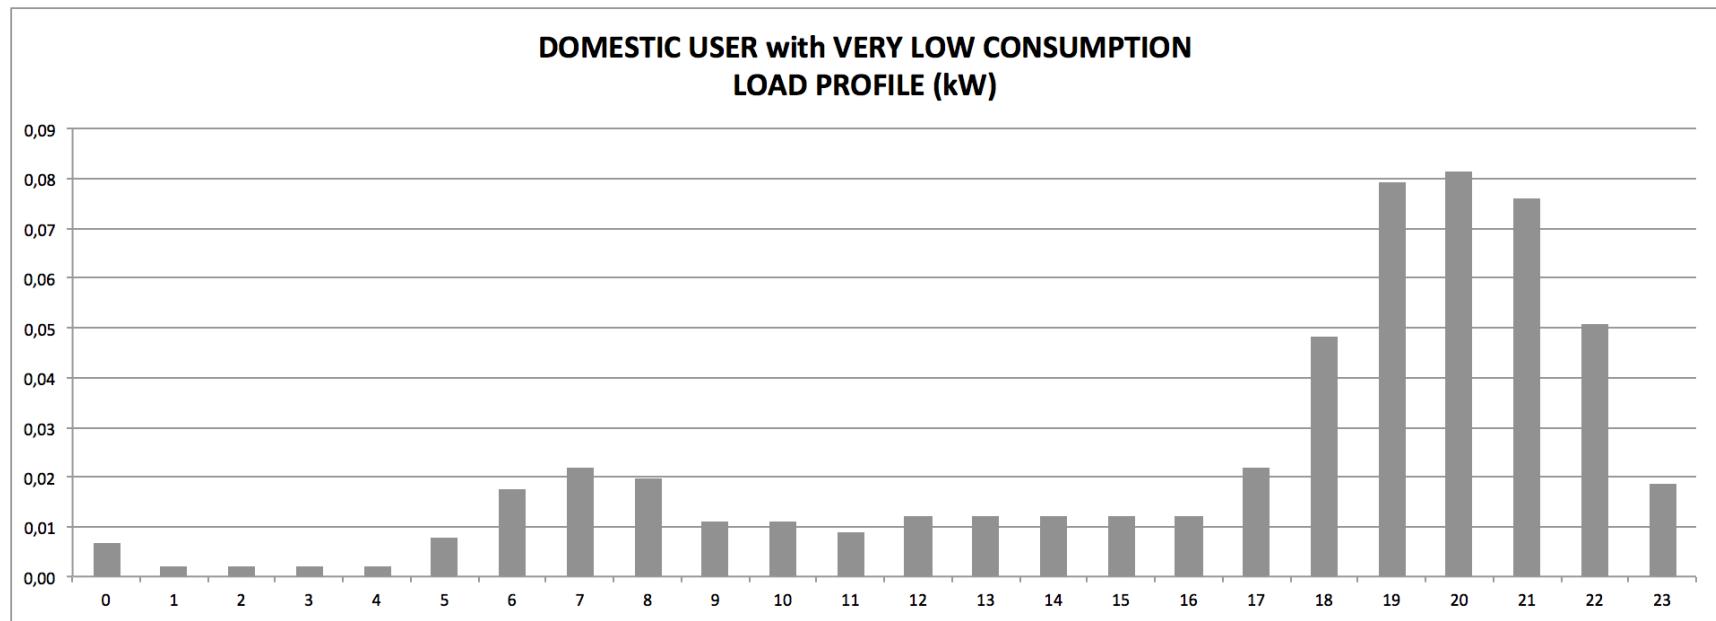




# Example of daily load profile (2)

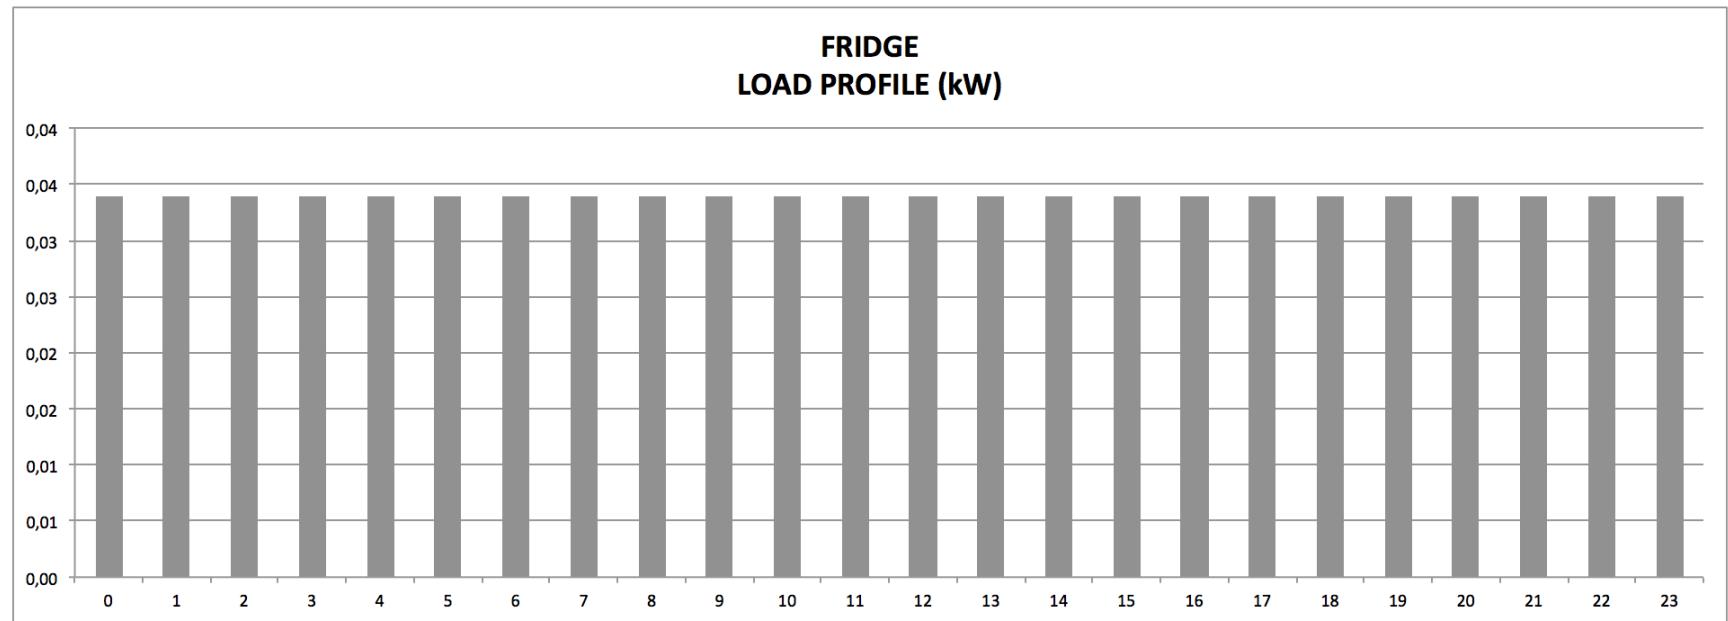




# Example of daily load profile (3)

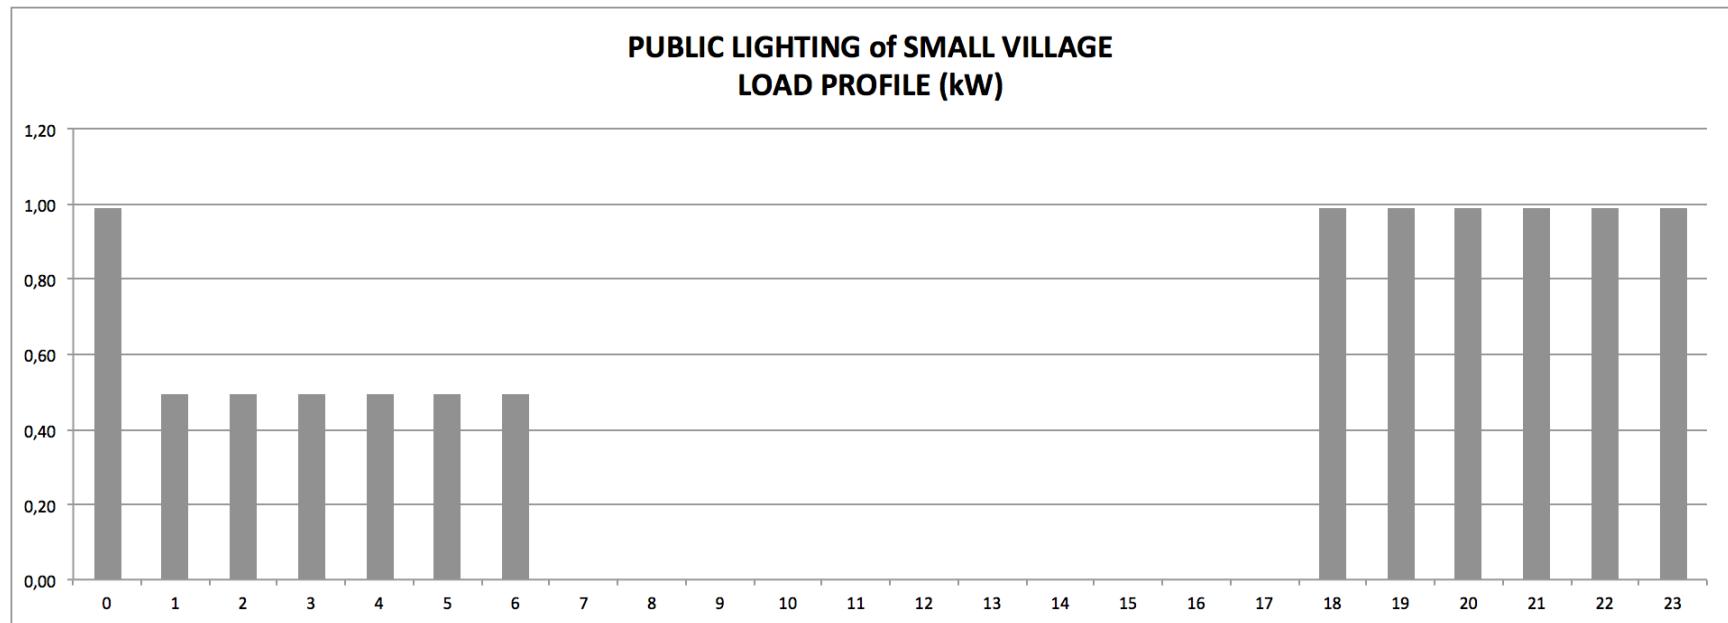



# Aggregated daily Load profile

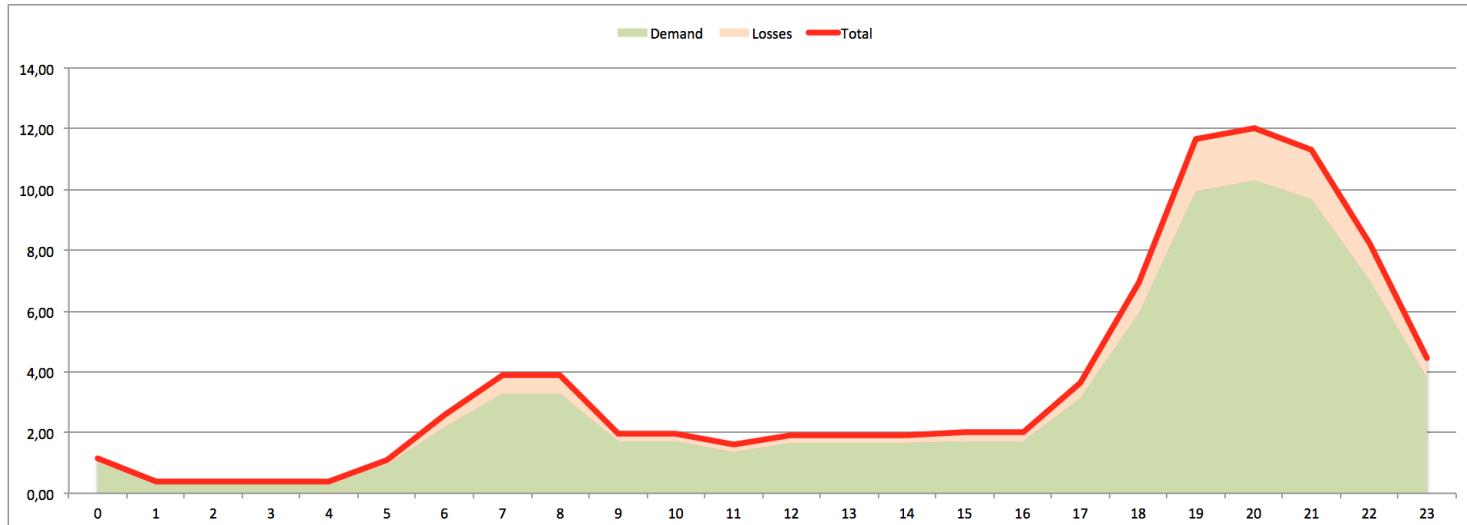

Time	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Demand	0,99	0,33	0,33	0,33	0,33	0,93	2,19	3,31	3,31	1,69	1,69	1,36	1,63	1,63	1,63	1,73	1,73	3,12	5,92	9,95	10,28	9,68	7,02	3,81
Losses	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Total	1,99	0,33	0,33	0,33	0,33	0,93	2,19	3,31	3,31	1,69	1,69	1,36	1,63	1,63	1,63	1,73	1,73	3,12	5,92	9,95	10,28	9,68	7,02	3,81

TOTAL ENERGY PER DAY 74,95 kWh

Losses Losses (kW) | 0,17 | 0,06 | 0,06 | 0,06 | 0,06 | 0,16 | 0,37 | 0,56 | 0,56 | 0,29 | 0,29 | 0,23 | 0,28 | 0,28 | 0,28 | 0,29 | 0,29 | 0,53 | 1,01 | 1,69 | 1,75 | 1,65 | 1,19 | 0,65 |


TOTAL ENERGY PER DAY 12,74 kWh

Total TOTAL Generation | 1,16 | 0,39 | 0,39 | 0,39 | 0,39 | 1,09 | 2,56 | 3,87 | 3,87 | 1,98 | 1,98 | 1,60 | 1,91 | 1,91 | 1,91 | 2,03 | 2,03 | 3,66 | 6,92 | 11,65 | 12,03 | 11,33 | 8,21 | 4,46 |

TOTAL ENERGY PER DAY 87,69 kWh



# Simulation softwares use (aggregated) Load daily Profile

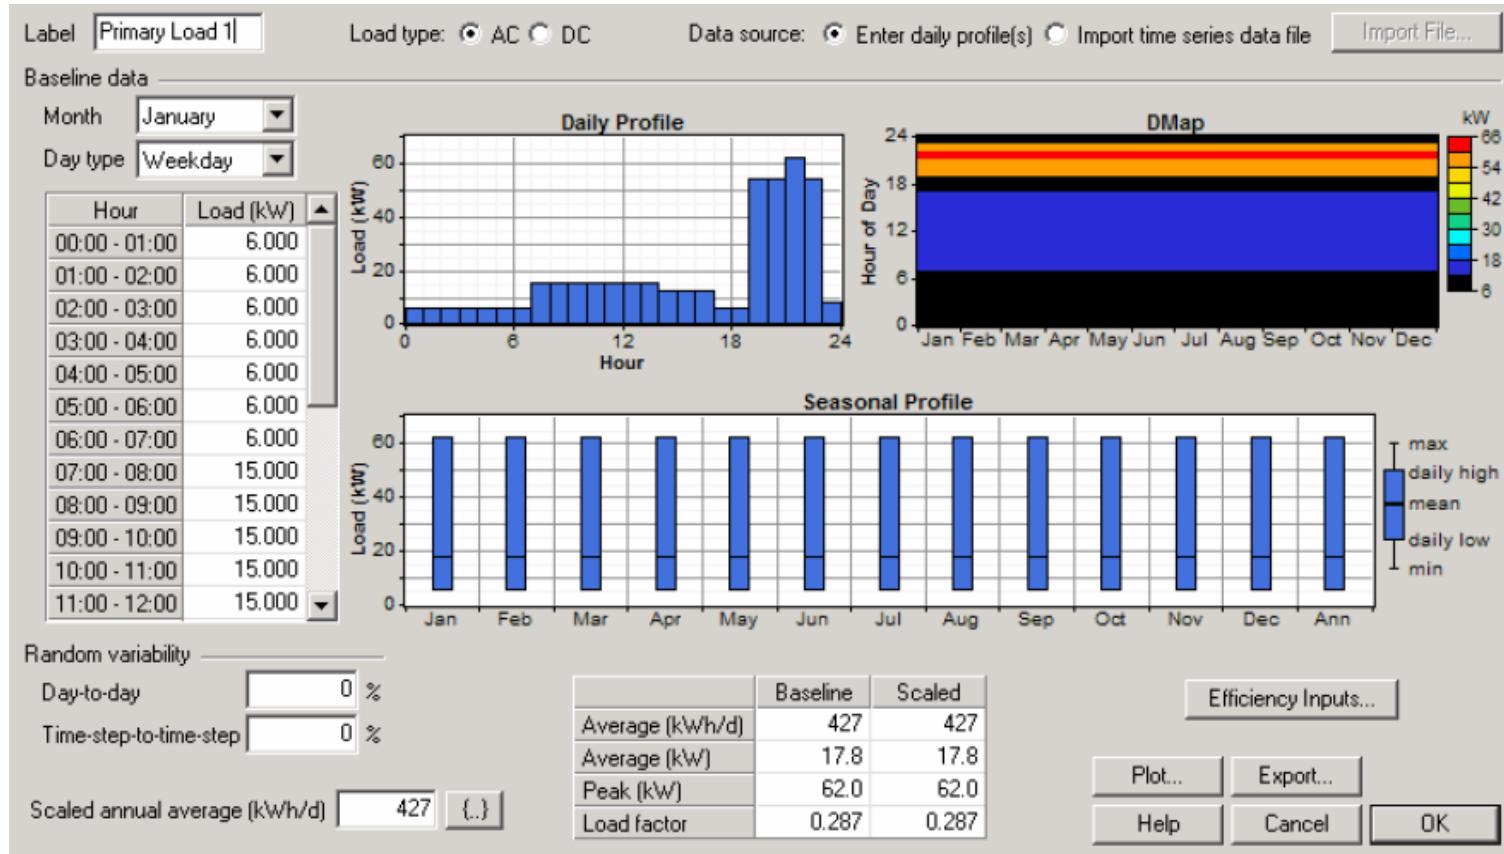

Source: HOMER ENERGY, 2011



# Recommendation on sizing and simulating RE hybrid systems with multiple users

- Users should have *dispenser meters* with Energy Daily Allowance (EDA) management according to the contracted tariff (limitations through smart devices that control the kWh of energy consumed).
- (...) The concept of *energy daily allowance* introduces certainty in the most uncertain parameter when sizing and simulating RE hybrid micro grids with multiple users

# Dispenser meter: a key device for dimensioning hybrid systems

- From a technological stance, it enables components like batteries and inverters to ***operate within their specified range***.
- From a financial point of view it reduces load uncertainty and its associated risk regarding collected revenues.
- From a social point of view, it responds to users' needs more accurately and guides them through the management of energy use and energy budget.







# VIII. Considerations on costs (I)

Comparison of costs of hybrid systems


# Type of costs related to an hybrid energy system

EXPENSES	INCOMES
Capital Costs	Tariff
Replacement costs	Subsidy
Operation, Maintenance and Management	...
Fuel	
...	

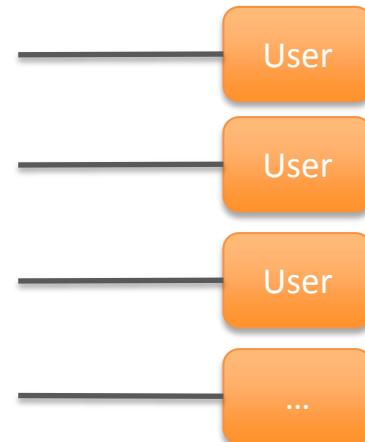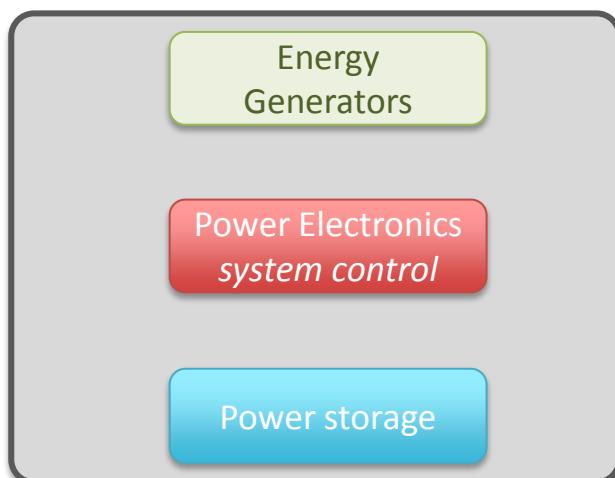

# Comparison costs of hybrid solutions

**Figure 3.1: Comparison of Cost Breakdown for each Option**

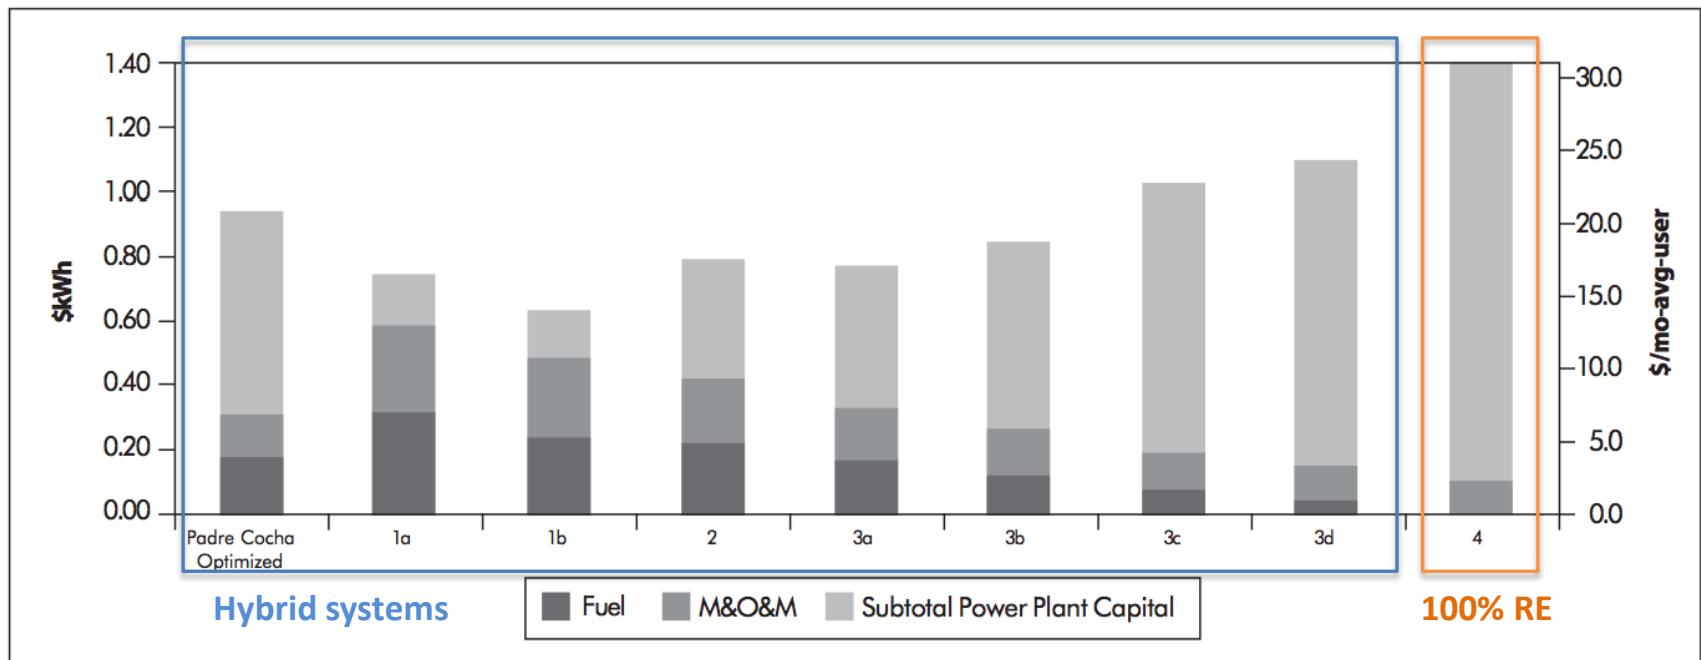

Split of leveledized costs at 10% of discount rate and fuel at 0.57 &/liter per energy unit and per user service for different case studies



# Comparison costs of hybrid solutions

			Power Conditioning		
			PV Arrays kWp	Genset kW	Batteries kWh
				Rectifier kW	Inverter kW
		Padre Cocha RAPS (Optimized) <sup>1</sup>	30	128	40
1.	Diesel-only	1a. Alternative One Stand-by Unit		1 x 36 kW	0
		1b. Alternative Peak and Off-peak		2 x 18 kW	0
2.		2. Diesel-battery-hybrid		1 x 36 kW	20
					10
3.	Diesel-PV- hybrid	3a. Solar PV 25%	25	36 kW	310
		3b. Solar PV 50%	50	36 kW	310
		3c. Solar PV 75%	75	36 kW	524
		3d. Solar PV 85%	93	36 kW	524
4.		4. Solar PV 100%	140	0	765
					0
					25


<sup>1</sup> Actual figures from Padre Cocha but with improvements to significantly reduce distribution losses.

# Grid extension costs

## Economical comparision: grid extension vs. hybrid systems (investment costs)

Grid extension costs are primarily distance dependent.  
 If the site is further away, the investment becomes higher.  
 PV Hybrid costs are related to the required generation capacity:  
 that depends on the required demand. Thus, for small  
 demand, a small investment is needed, for large demand, a larger  
 investment is needed. The break even "distance" is therefore related  
 to the demand.

- Public grid
- 30 kWp PV power supply
- 12 kWp PV power supply
- 5 kWp PV power supply
- 3 kWp PV power supply

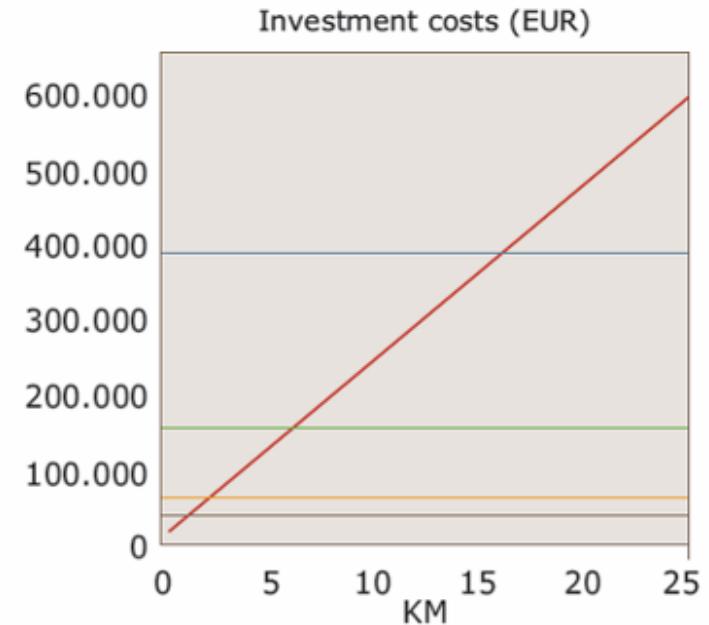

- The extension of the grid has to be taken into consideration when dimensioning and simulating an isolated multi user hybrid system.




# IX. Considerations on costs (II)

The levelized Cost of Energy



# Simulation softwares give the possibility to analyze economics

- Scenario for a life cycle of 20 years, cash flow evolution as a result of aggregated incomes and expenses.

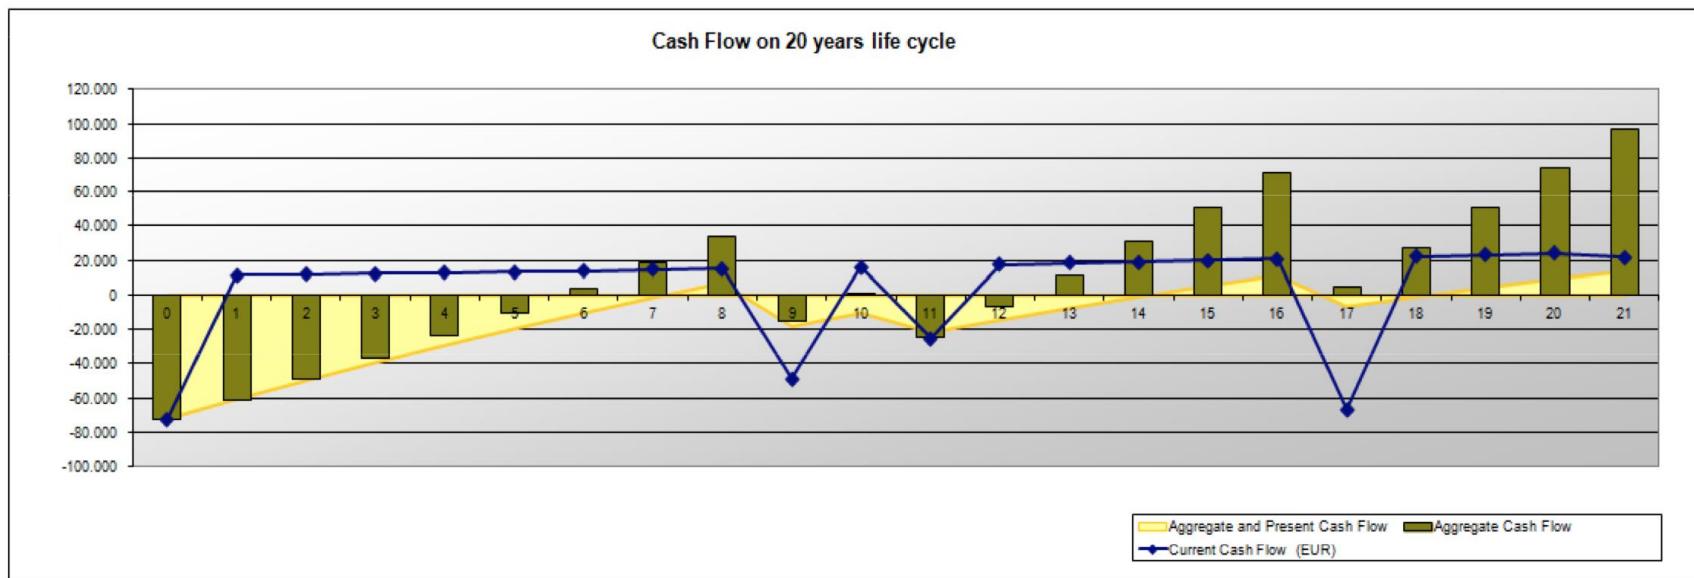



# Levelized cost of Energy (LCOE)

- Cash flow evolution of several possible hybrid systems may differ, specially due to the type of technology chosen: replacement costs are not the same for PV solar panels than for Wind generators, different batteries have different replacement costs, and the costs at the beginning of a life cycle are not “economically” the same as the costs at the end of the life cycle due to the evolution of the value of a currency through the years (among other factors).
- We need a reference value to compare different multi year scenarios.
- LCOE is a constant value (\$/kWh) used as a reference to compare (through a life cycle period) different technologies and systems that produce energy.
- It is referred to the minimum energy income per kWh, that equals expenses of the implementation and operation of the system with the incomes generated by the system.
- The LCOE is based on the Net Present Value economical methodology in a multi year scenario.



# Simple example: one year scenario

How much has to be the energy income (\$ per kWh) to pay back the cost of the system in one year?

$$\text{Cost of the Hybrid System (\$)} = \text{Energy generated (kWh)} \cdot \text{Energy cost (\$/kWh)}$$

So,

$$\text{Energy cost (\$/kWh)} = \text{Cost of the system (\$)} / \text{Energy generated (kWh)}$$

Note.- When performing a rigorous financial analysis of a system we should consider “energy to sell” (the amount of kWh that can be sold to the consumer) rather than energy generated. Energy generated normally is higher than energy consumed. For example, losses can not be sold to someone and get incomes. So the leveled cost of an energy system is better to be related to the energy potentially being sold, rather than simply to the energy generated.



# Understanding LCOE in 3 steps (Net Present Value)

*one year scenario*

1	INCOMES (\$)	=	EXPENSES (\$)
	Energy generated (kWh) • Energy cost (\$/kWh)	=	Costs of the Hybrid System (\$)

*multi year scenario*

2	NPV (INCOMES) (\$)	=	NPV (EXPENSES) (\$)
	NPV (Energy generated • Energy cost)	=	NPV (Costs of the Hybrid System)

*the Levelized Cost of Energy is a **constant value** through the life cycle -by definition-*

3	Life Cycle INCOMES (\$)	=	Life Cycle EXPENSES (\$)
	Energy cost • NPV (Energy generated)	=	NPV (Costs of the Hybrid System)

*This Energy cost is the LCOE*

$$LCOE = \frac{\sum_{t=1}^t \frac{C_t}{(1+d_{nom})^t}}{\sum_{t=1}^t \frac{E_t}{(1+d_{nom})^t}}$$

Source: ECREEE




# More about LCOE

Range of forecast costs by type of generating technology.

The LCOE is a way to compare different technologies of electricity generation with different cash-flows.

Figure 2: Mini-grid Forecast Generating Costs

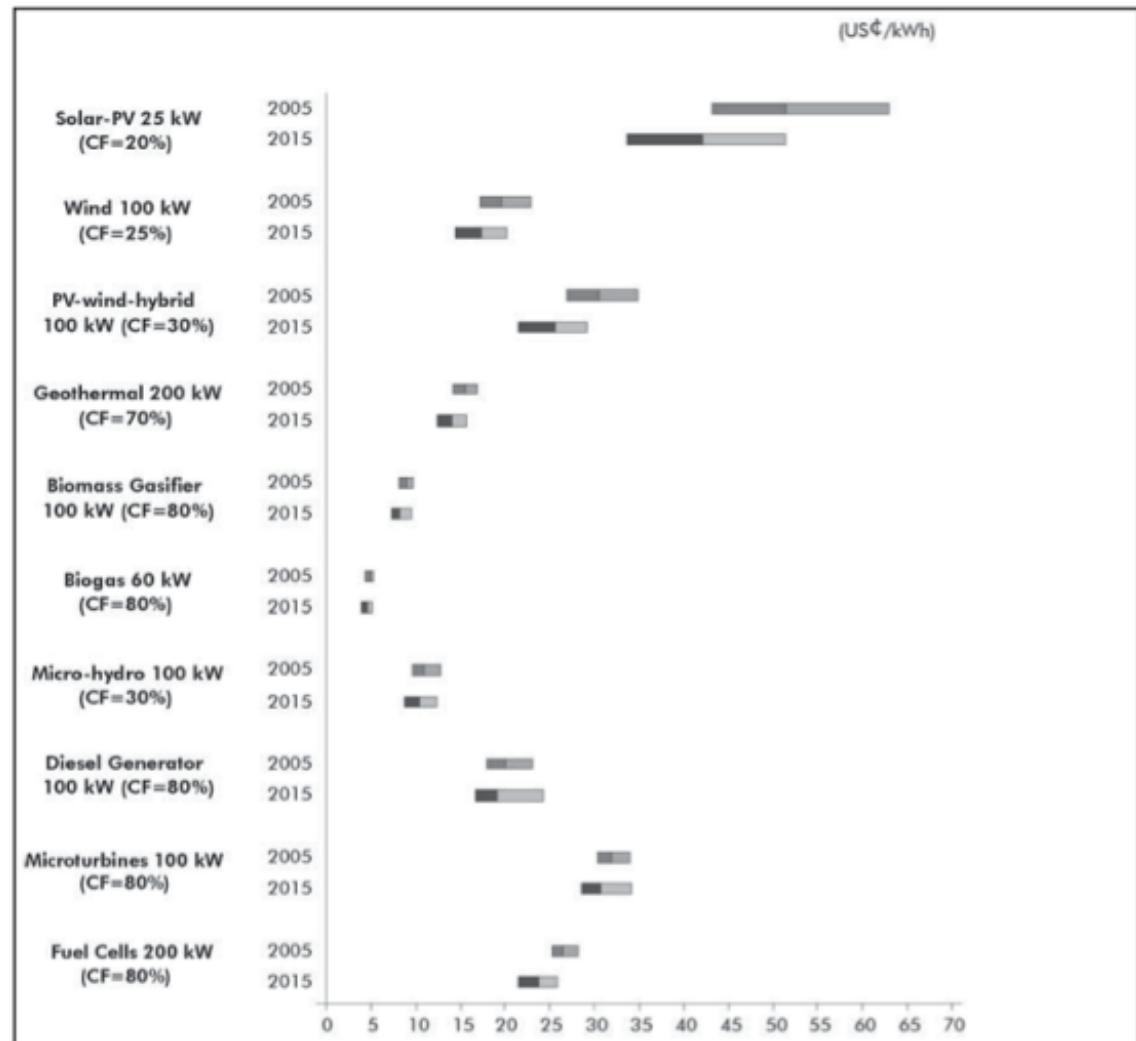

Source: ESMAP, 2007



# X. About the HOMER software


**H**ybrid **O**ptimization **M**odel for **E**lectric **R**enewables



# About the HOMER software


- HOMER is an *energy modeling software*.
- It is powerful tool for designing and analyzing *hybrid power systems*.
- The hybrid power systems contain a mix of conventional generators, combined heat and power, wind turbines, solar photovoltaics, batteries, fuel cells, hydropower, biomass and other inputs.
- It is currently used all over the world by tens of thousands of people.
- ✓ For further reading (2): **CLICK ON THE LINK OR COPY AND PASTE THIS LINK INTO YOUR WEB BROWSER ADDRESS BAR**  
<http://www.ecowrex.org/document/getting-started-guide-homer-legacy-version-268>

# Examples of the user interface

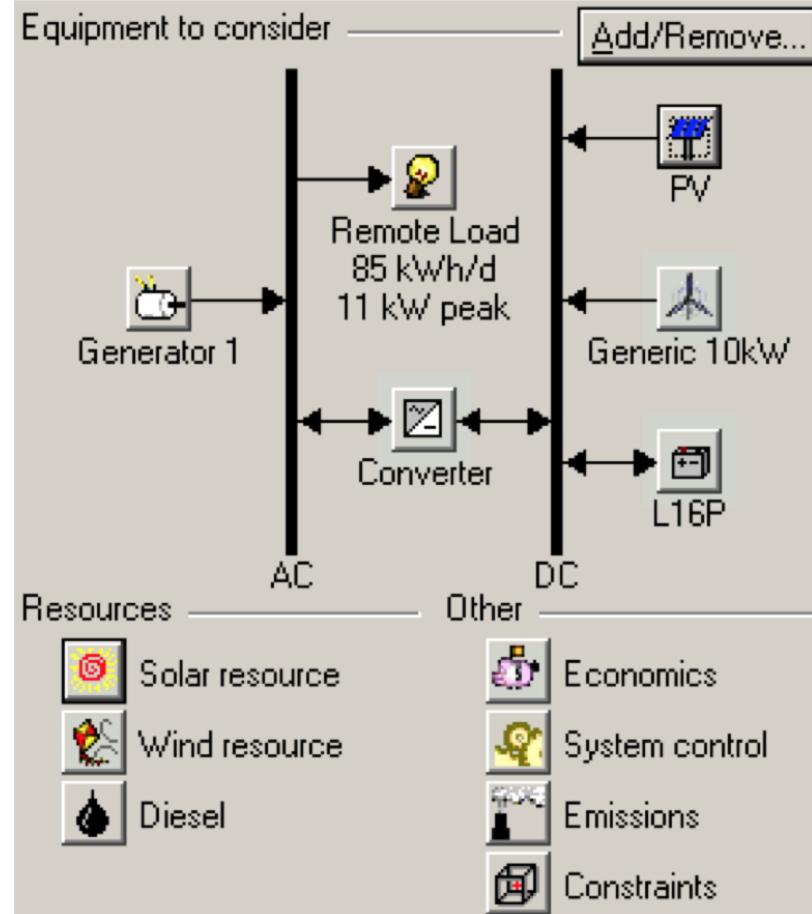



# Examples of the user interface

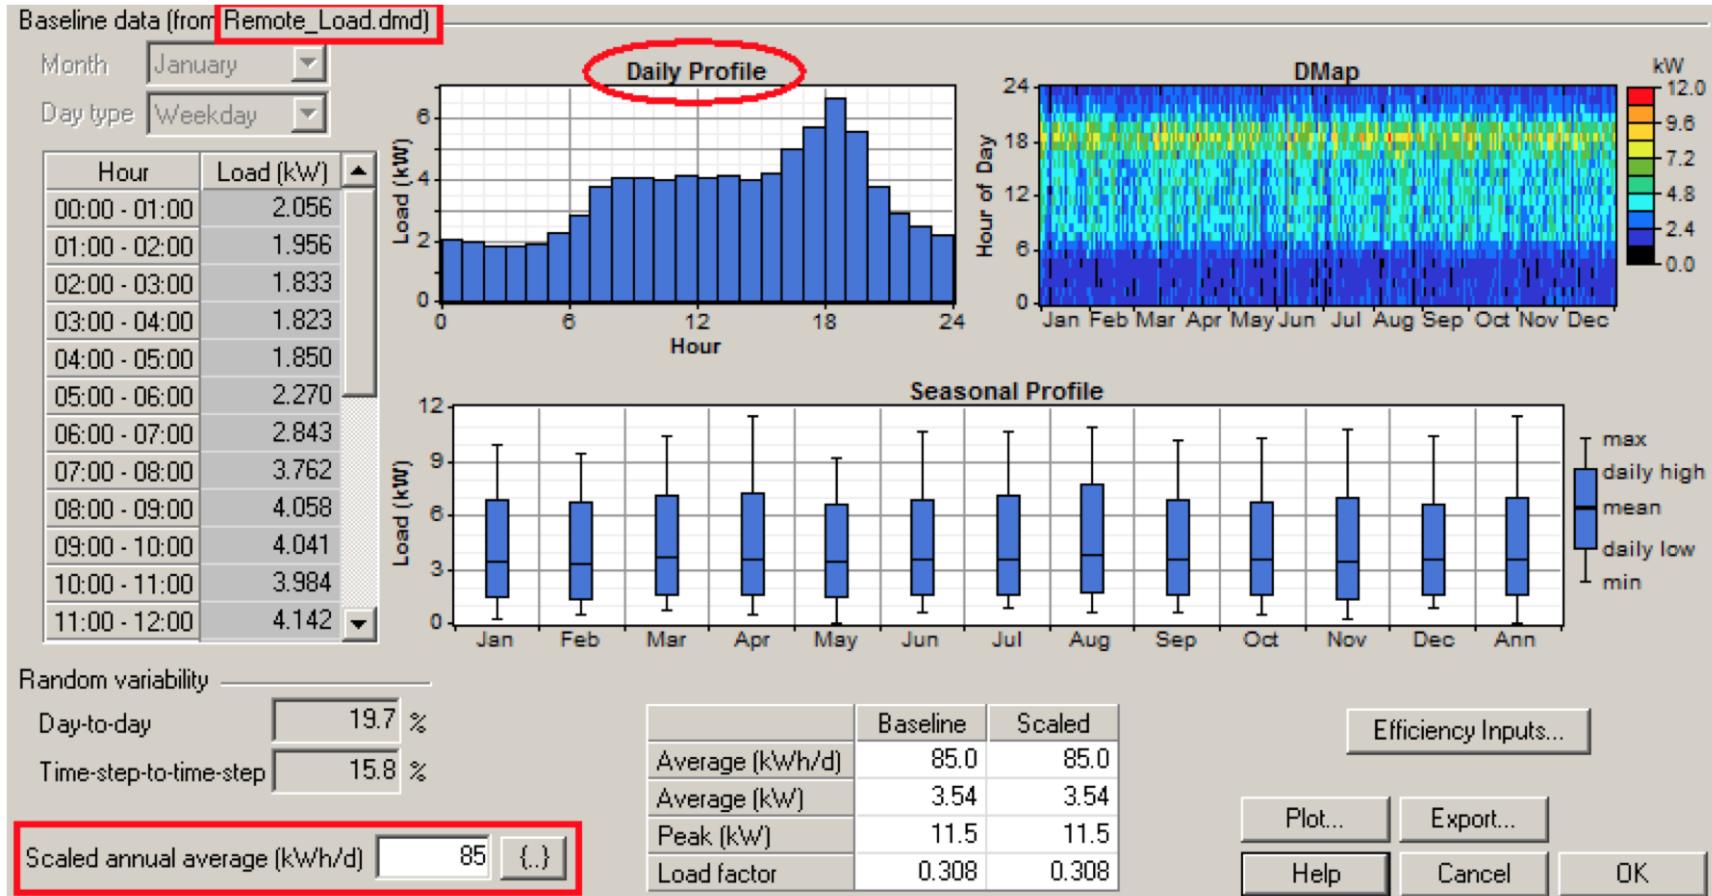

Source: HOMER ENERGY, 2011




# Examples of the user interface

Baseline data (from AK.Cold Bay.sol)

Month	Clearness	Daily Radiation
	Index	(kWh/m <sup>2</sup> /d)
January	0.366	0.621
February	0.401	1.251
March	0.414	2.260
April	0.379	3.108
May	0.330	3.446
June	0.343	3.928
July	0.333	3.646
August	0.329	2.973
September	0.315	2.009
October	0.360	1.366
November	0.363	0.728
December	0.341	0.446
Average:	0.349	2.153

Scaled annual average (kWh/m<sup>2</sup>/d)


2.15

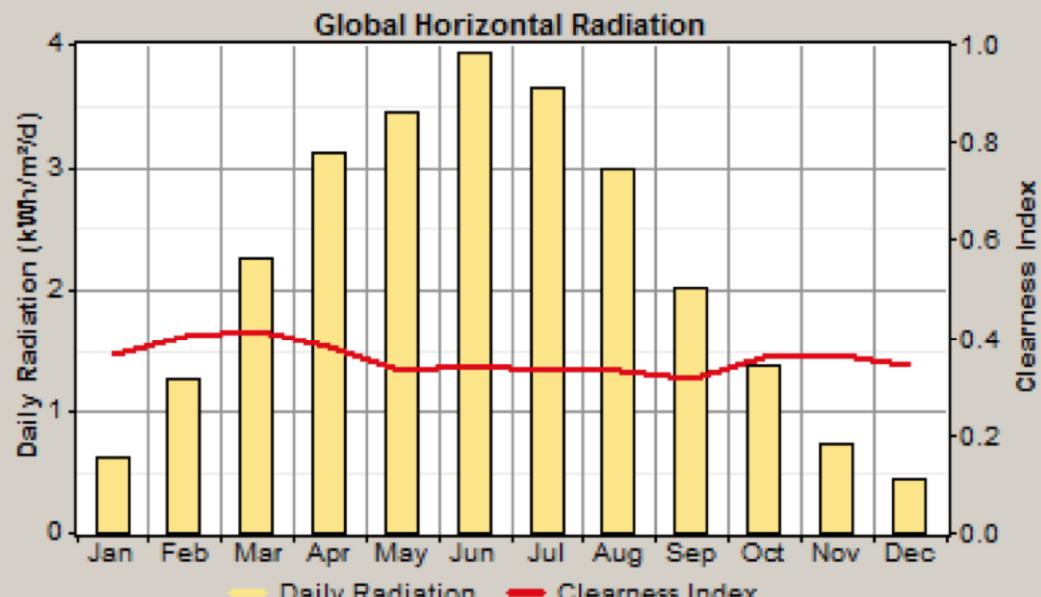

Plot...	Export...
Help	Cancel
OK	



# Examples of the user interface

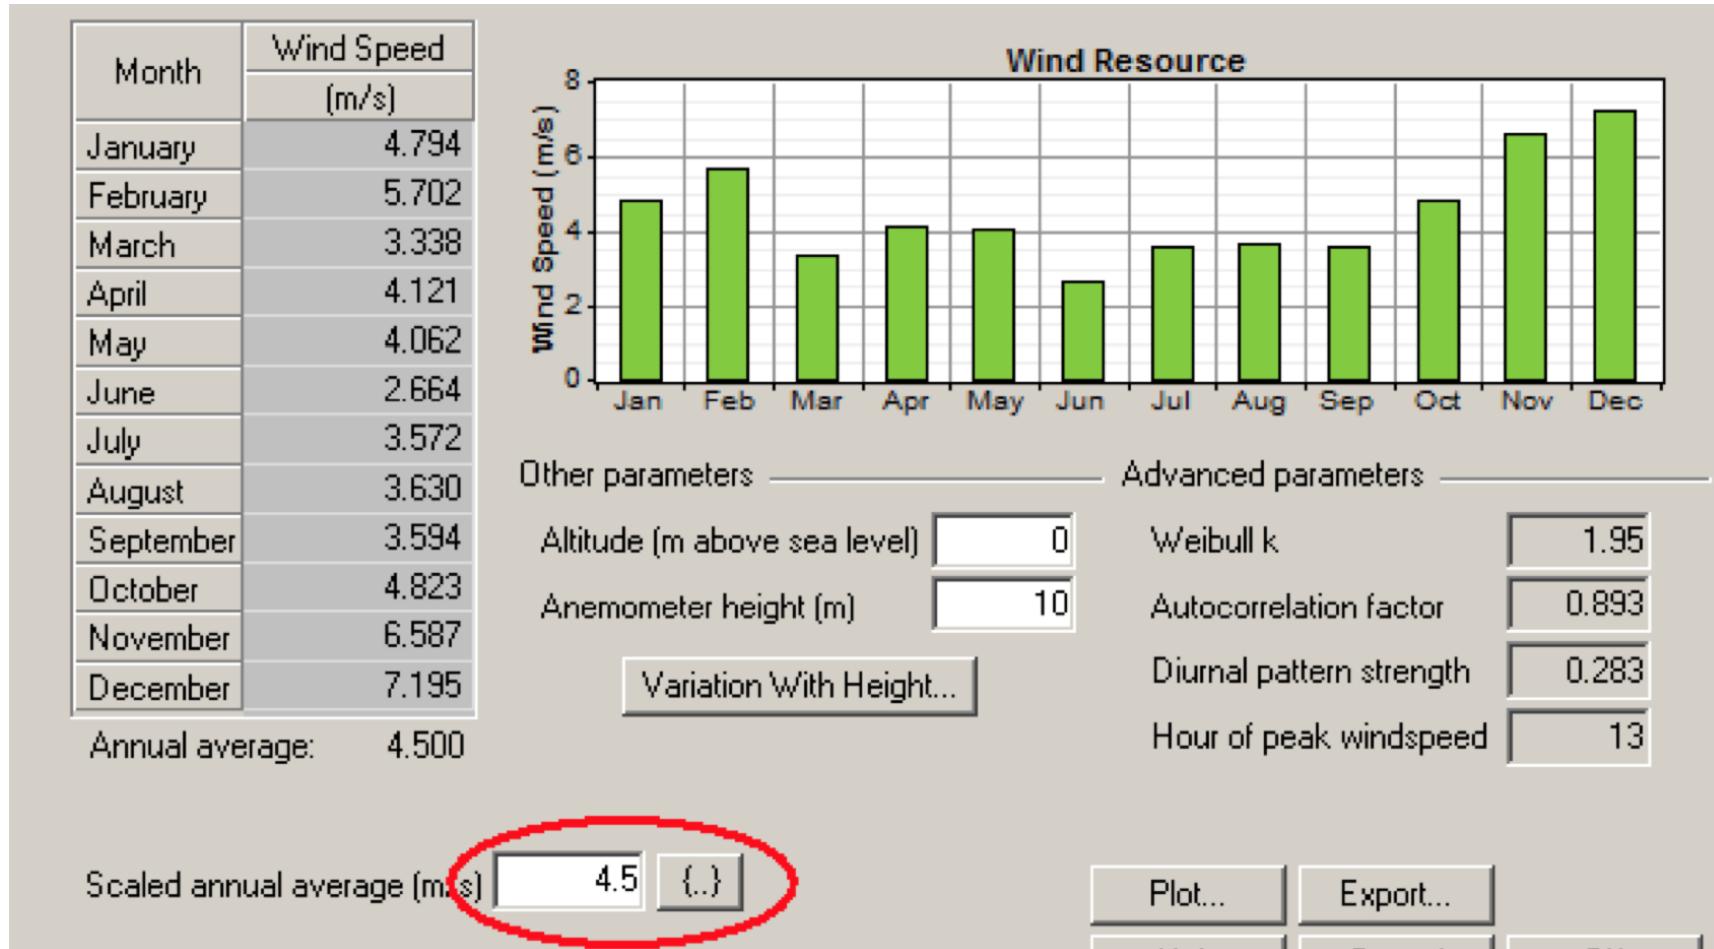

Source: HOMER ENERGY, 2011



# Examples of the user interface

Sensitivity Results   Optimization Results

Sensitivity variables

Global Solar (kWh/m<sup>2</sup>/d) 4   Wind Speed (m/s) 7   Diesel Price (\$/L) 0.7

Double click on a system below for simulation results.

Categorized    Other

	PV (kW)	G10	Label (kW)	L16P	Conv. (kW)	Initial Capital	Operating Cost (\$/yr)	Total NPC	COE (\$/kWh)	Ren. Frac.	Diesel (L)	Label (hrs)
	1	15	56	6	\$ 75,300	13,661	\$ 249,935	0.630	0.58	6,890	2,011	
	1	1	15	56	6	\$ 82,300	13,140	\$ 250,278	0.631	0.62	6,482	1,927
			15	32	6	\$ 38,100	22,744	\$ 328,842	0.829	0.00	14,464	4,318
	3		15	56	6	\$ 66,300	20,794	\$ 332,111	0.837	0.12	12,529	3,344

Source: HOMER ENERGY, 2011



# Convenience of an energy simulation tool and when?

- The hybrid systems have a high level of complexity related to the possibility of many combinations and solutions.
- Due to the interaction of several energy resources, many industrial technologies and prices, different energy user profiles, constrains and costs, etc... it is very convenient to use a powerful simulation tool to achieve good compromised solutions and to analyze different scenarios
- Very suitable for analysis and feasibility studies.
- Once the type of solution is targeted, other experienced methodology of calculation and dimensioning may apply.



# HOMER compared to other softwares

HOMER simulates the annual performance of each of the system combination possibilities for a specified set of energy sources and calculates also the system and operating costs over the given period.

The outcome of the simulation is a list of the possible systems in order of the arising costs. A graph depicts the various ranges of the most profitable systems over the given operating period, based on the selected criteria.

Detailed results can be output for each of the individual simulated systems (graphs, tables, scatter plot, print-out).

- ✓ For further reading (3): **CLICK ON THE LINK OR COPY AND PASTE THIS LINK INTO YOUR WEB BROWSER ADDRESS BAR**  
<http://www.ecowrex.org/document/world-wide-overview-design-and-simulation-tools-hybrid-pv-systems>



# ECREEE Regional Training of Trainers Workshop: HOMER software for RE project design

Simulation models are very useful; one important thing is to set the right questions to them and know how to interpret the given results; always, and in any stage of the project design.

*“Computers are useless. They can only give you answers.”*

Pablo Picasso



# References

- ARE (2008), *Hybrid power systems based on renewable energies: a suitable and cost-competitive solution for rural electrification*, Alliance for Rural Electrification, Brussels.  
<http://www.ecowrex.org/document/hybrid-power-systems-based-renewable-energies-suitable-and-cost-competitive-solution-rural>
- BRIGANTI, M., VALLVÉ, X., ALVES, L., PUJOL, D., CABRAL, J., LOPES, C. (2012), *Implementation of a PV rural micro grid in the island of Santo Antao (Cape Verde)*, 27th European Photovoltaic Solar Energy Conference and Exhibition, Frankfurt.  
<http://www.ecowrex.org/document/implementation-pv-rural-micro-grid-island-santo-antao-cape-verde-individual-energy>
- ESMAP (2007), *ESMAP Technical Paper 121/07 Technical and Economic Assessment of Off-grid, Mini-grid and Grid Electrification Technologies*, The World Bank, Washington.  
<http://www.ecowrex.org/document/technical-and-economic-assessment-grid-mini-grid-and-grid-electrification-technologies>
- ESMAP (2007b), *ESMAP Technical Paper 111/07 solar-diesel Hybrid Options for the Peruvian Amazon. Lessons Learned from Padre Cocha*, The World Bank, Washington.  
<http://www.ecowrex.org/document/solar-diesel-hybrid-options-peruvian-amazon-lessons-learned-padre-cocha>
- GRAILLOT, A., BRIGANTI, M., SOLANO-PERALTA, M., VALLVÉ, X., (2012), "Daily Energy Allowance" concept in rural micro grids. 15 years of experience, 6th European PV-Hybrid and Mini-Grid Conference, Chambéry.  
<http://www.ecowrex.org/document/15-years-field-experience-daily-energy-allowance-concept-basis-load-control-and-guide>
- HOMER Energy (2011), *Getting Started Guide for HOMER Legacy (Version 2.68)*, Homer Energy and National Renewable Energy Laboratory, Colorado.  
<http://www.ecowrex.org/document/getting-started-guide-homer-legacy-version-268>
- IEA, (2011), Report IEA-PVPS T11- 01:2011 World-wide overview of design and simulation tools for hybrid PV systems.  
<http://www.ecowrex.org/document/world-wide-overview-design-and-simulation-tools-hybrid-pv-systems>



# References

- *ECREEE* <http://www.ecreee.org>
- *ECOWREX* <http://www.ecowrex.org>
- *HOMER ENERGY* <http://www.homenergy.org>
- *SMA Solar Technology AG* <http://www.sma.de/en.html>
- *TRAMA TECNOAMBIENTAL* <http://www.tta.com.es>



*ECOWAS Regional Centre for  
Renewable Energy and Energy Efficiency*

*Centre Régional pour les Energies Renouvelables  
et l'Efficacité Energétique de la CEDEAO*

*Centro Regional para Energias Renováveis e  
Eficiência Energética da CEDEAO*

**Merci! Thank you! Muito obrigado!**

**ECREEE Secretariat**  
**Achada Santo Antonio**  
**B.P. 288, Praia – Cape Verde**  
**Tel: +2382624600**  
<http://www.ecreee.org>  
[info@ecreee.org](mailto:info@ecreee.org)